




PORTAFUSIBILI  
 FUSE - HOLDERS  
 PORTE-FUSIBLES  
 SICHERUNGSHALTER

TIPO  
 TYPE  
 TYPE  
 TYP

PTF / 30

PER FUSIBILI  
 FOR FUSES  
 POUR FUSIBLES  
 FÜR SICHERUNGEN

5 X 20

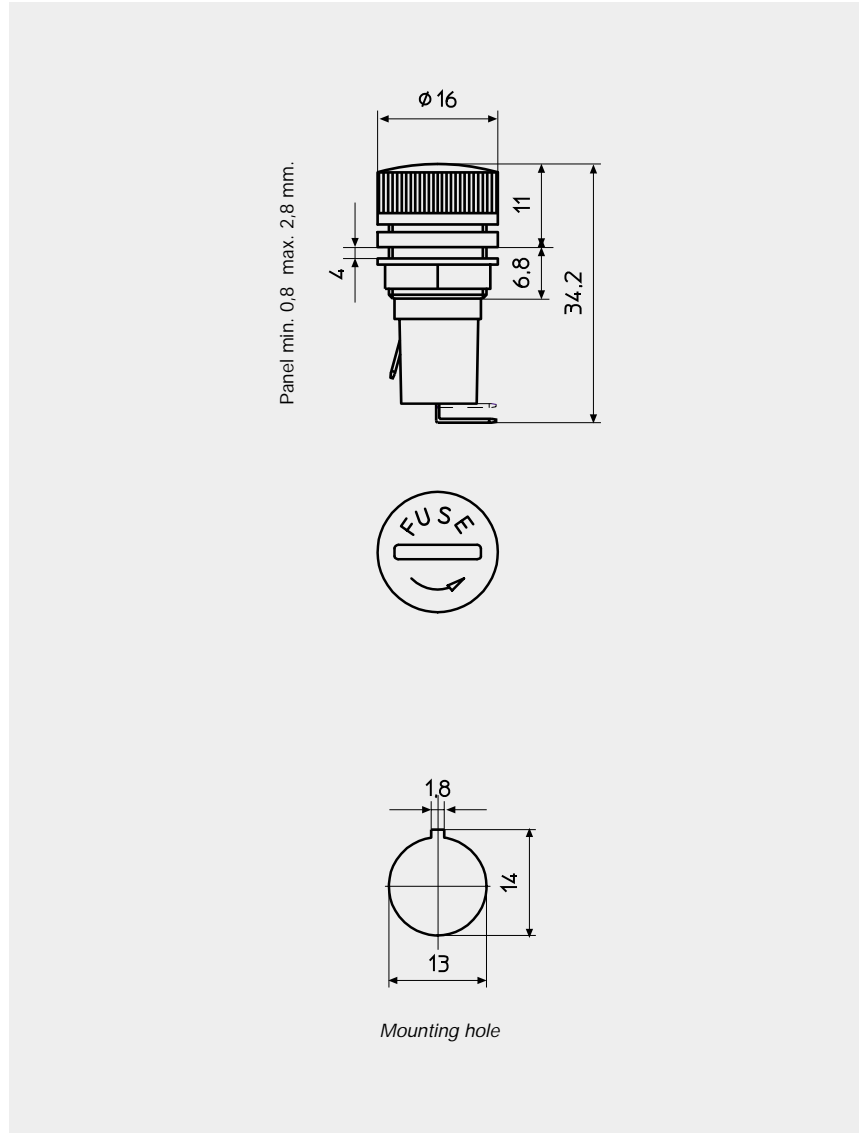

DA PANNELLO

FOR PANEL

POUR PANNEAU

FÜR TAFEL

CE

Corpo isolante Nero	Insulating body Black	Corps Isolant Noir	Isolierkörper Schwarz	PC UL 94 V0
Coperchio a vite	Screw cover	Couverture à vis	Schraubendeckel	
Contatti	Contacts	Contacts	Kontakte	CuZn 37 + Ni + Sn
Categoria	Class	Catégorie	Baureihe	PC1
Corrente nominale	Nominal current	Courant nominal	Strombelastbarkeit	6,3 A
Tensione	Voltage	Tension	Betriebsspannung	250 V
Potenza dissipabile	Operating power	Puissance dissipable	Ausgangsleistung	2,5 W
Resistenza di contatto	Contact resistance	Résistance de contact	Übergangswiderstand	< 5 m Ω
Resistenza di isolamento	Insulation resistance	Résistance d'isolement	Isolationswiderstand	> 10 <sup>2</sup> M Ω
Rigidità dielettrica	Dielectric strength	Rigidité diélectrique	Durchschlagsfestigkeit	> 3000 Vac / 60 "