


HEXFET® Power MOSFET

- Dynamic dv/dt Rating
- Repetitive Avalanche Rated
- Surface Mount (IRFR9220)
- Straight Lead (IRFU9220)
- Available in Tape & Reel
- P-Channel
- Fast Switching



$$V_{DSS} = -200V$$


$$R_{DS(on)} = 1.5\Omega$$

$$I_D = -3.6A$$

Description

The HEXFET technology is the key to International Rectifier's advanced line of power MOSFET transistors. The efficient geometry and unique processing of the HEXFET design achieve very low on-state resistance combined with high transconductance and extreme device ruggedness.

The D-Pak is designed for surface mounting using vapor phase, infrared, or wave soldering techniques. The straight lead version (IRFU series) is for through-hole mounting applications. Power dissipation levels up to 1.5 watts are possible in typical surface mount applications.


DATA SHEETS
Absolute Maximum Ratings

Parameter	Max.	Units
I_D @ $T_C = 25^\circ C$ Continuous Drain Current, V_{GS} @ -10 V	-3.6	A
I_D @ $T_C = 100^\circ C$ Continuous Drain Current, V_{GS} @ -10 V	-2.3	
I_{DM} Pulsed Drain Current ①	-14	
P_D @ $T_C = 25^\circ C$ Power Dissipation	42	W
P_D @ $T_A = 25^\circ C$ Power Dissipation (PCB Mount)**	2.5	
Linear Derating Factor	0.33	W/°C
Linear Derating Factor (PCB Mount)**	0.020	
V_{GS} Gate-to-Source Voltage	± 20	V
E_{AS} Single Pulse Avalanche Energy ②	310	mJ
I_{AH} Avalanche Current ③	-3.6	A
E_{AR} Repetitive Avalanche Energy ①	4.2	mJ
dv/dt Peak Diode Recovery dv/dt ③	-5.0	V/ns
T_J, T_{STG} Junction and Storage Temperature Range	-55 to +150	°C
Soldering Temperature, for 10 seconds	260 (1.6mm from case)	

Thermal Resistance

Parameter	Min.	Typ.	Max.	Units
$R_{\theta JC}$ Junction-to-Case	—	—	3.0	°C/W
$R_{\theta JA}$ Junction-to-Ambient (PCB mount)**	—	—	50	
$R_{\theta SA}$ Junction-to-Ambient	—	—	110	

** When mounted on 1" square PCB (FR-4 or G-10 Material).

For recommended footprint and soldering techniques refer to application note #AN-994.

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameter	Min.	Typ.	Max.	Units	Test Conditions
$V_{(BR)DSS}$ Drain-to-Source Breakdown Voltage	-200	—	—	V	$V_{GS}=0V$, $I_D=-250\mu A$
$\Delta V_{(BR)DSS}/\Delta T_J$ Breakdown Voltage Temp. Coefficient	—	-0.22	—	$V/^\circ\text{C}$	Reference to 25°C , $I_D=-1mA$
$R_{DS(on)}$ Static Drain-to-Source On-Resistance	—	—	1.5	Ω	$V_{GS}=10V$, $I_D=-2.2A$ ④
$V_{GS(th)}$ Gate Threshold Voltage	-2.0	—	-4.0	V	$V_{DS}=V_{GS}$, $I_D=-250\mu A$
g_{fs} Forward Transconductance	1.1	—	—	S	$V_{DS}=50V$, $I_D=-2.2A$ ④
I_{DSS} Drain-to-Source Leakage Current	—	—	-100 -500	μA	$V_{DS}=200V$, $V_{GS}=0V$ $V_{DS}=160V$, $V_{GS}=0V$, $T_J=125^\circ\text{C}$
I_{GSS} Gate-to-Source Forward Leakage	—	—	-100	nA	$V_{GS}=20V$
I_{GSS} Gate-to-Source Reverse Leakage	—	—	100	nA	$V_{GS}=20V$
Q_g Total Gate Charge	—	—	20	nC	$I_D=-3.9A$
Q_{gs} Gate-to-Source Charge	—	—	3.3	nC	$V_{DS}=160V$
Q_{gd} Gate-to-Drain ("Miller") Charge	—	—	11	nC	$V_{GS}=10V$ See Fig. 6 and 13 ④
$t_{d(on)}$ Turn-On Delay Time	—	8.8	—	ns	$V_{DD}=100V$
t_r Rise Time	—	27	—	ns	$I_D=-3.9A$
$t_{d(off)}$ Turn-Off Delay Time	—	7.3	—	ns	$R_G=18\Omega$
t_f Fall Time	—	19	—	ns	$R_D=24\Omega$ See Figure 10 ④
L_D Internal Drain Inductance	—	4.5	—	nH	Between lead, 6 mm (0.25in.) from package and center of die contact
L_S Internal Source Inductance	—	7.5	—	nH	
C_{iss} Input Capacitance	—	340	—	pF	$V_{DS}=0V$
C_{oss} Output Capacitance	—	110	—	pF	$V_{DS}=-25V$
C_{rss} Reverse Transfer Capacitance	—	33	—	pF	$f=1.0MHz$ See Figure 5

Source-Drain Ratings and Characteristics

Parameter	Min.	Typ.	Max.	Units	Test Conditions
I_S Continuous Source Current (Body Diode)	—	—	-3.6	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM} Pulsed Source Current (Body Diode) ③	—	—	-14	A	
V_{SD} Diode Forward Voltage	—	—	-6.3	V	$T_J=25^\circ\text{C}$, $I_S=-3.6A$, $V_{GS}=0V$ ④
t_{rr} Reverse Recovery Time	—	150	300	ns	$T_J=25^\circ\text{C}$, $I_F=-3.9A$
Q_{rr} Reverse Recovery Charge	—	0.97	2.0	μC	$di/dt=100A/\mu s$ ④
t_{on} Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by L_S-L_D)				

Notes:

① Repetitive rating; pulse width limited by max. junction temperature (See Figure 11)

② $I_{SD} \leq 3.9A$, $di/dt < 95A/\mu s$, $V_{DD} \leq V_{(BR)DSS}$, $T_J < 150^\circ\text{C}$

③ $V_{DD} = -50V$, starting $T_J = 25^\circ\text{C}$, $L = 35mH$, $R_G = 25\Omega$, $I_{AS} = -3.6A$ (See Figure 12)

④ Pulse width $\leq 300\mu s$; duty cycle $\leq 2\%$.

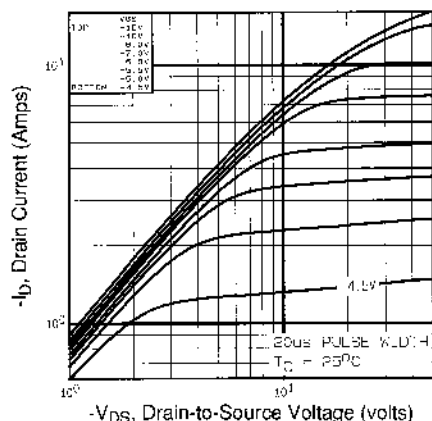


Fig 1. Typical Output Characteristics,
 $T_C = 25^\circ\text{C}$

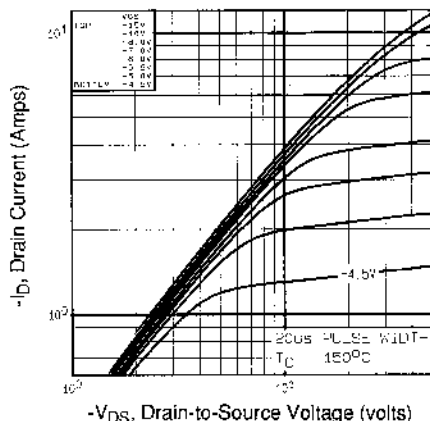


Fig 2. Typical Output Characteristics,
 $T_C = 150^\circ\text{C}$

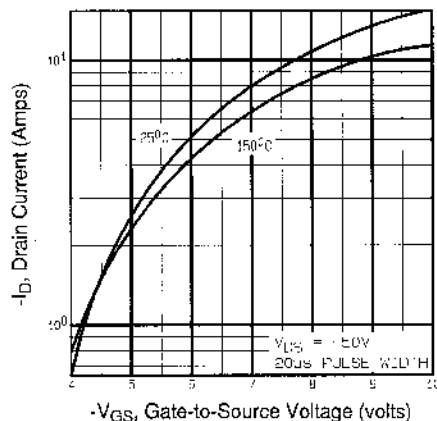


Fig 3. Typical Transfer Characteristics

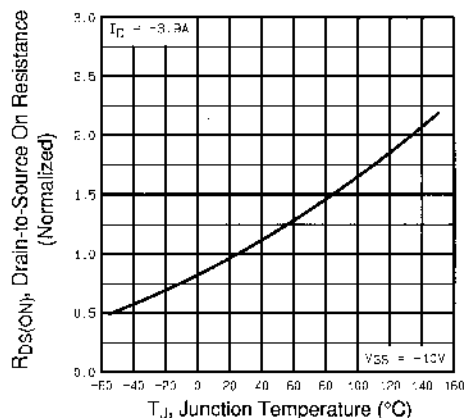


Fig 4. Normalized On-Resistance
Vs. Temperature

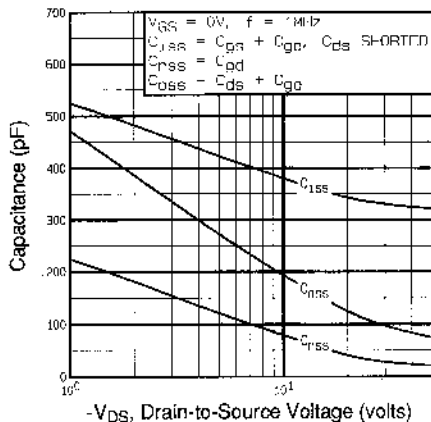


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

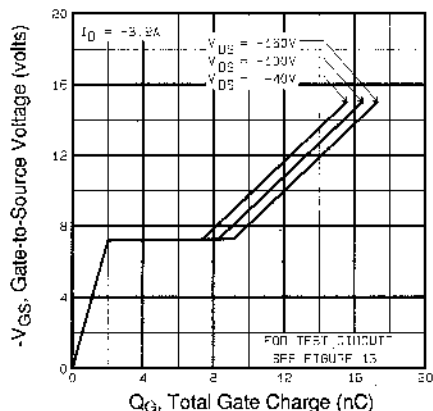


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

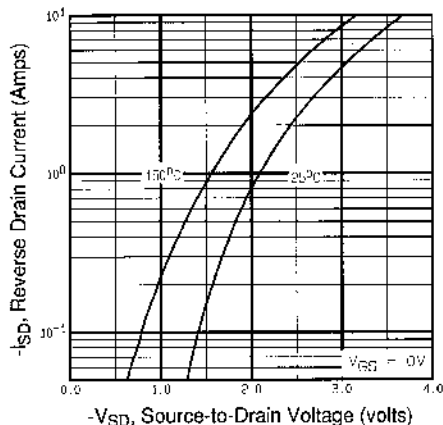


Fig 7. Typical Source-Drain Diode Forward Voltage

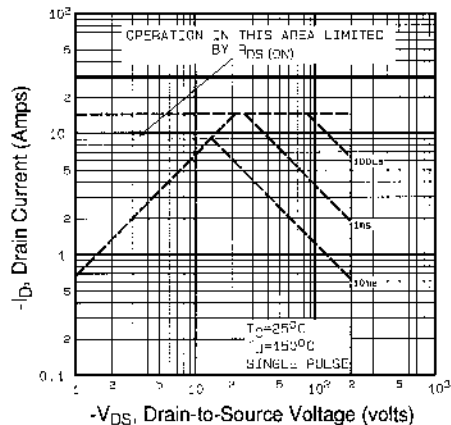


Fig 8. Maximum Safe Operating Area

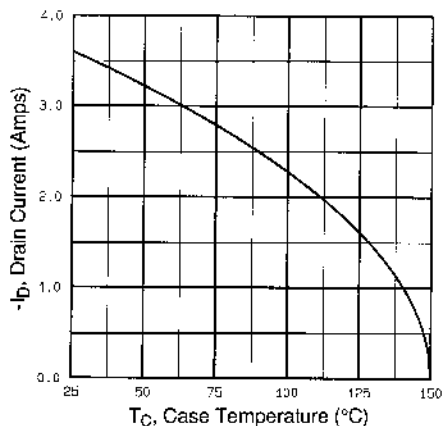


Fig 9. Maximum Drain Current Vs. Case Temperature

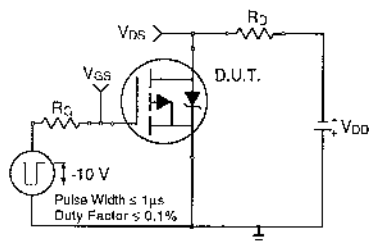


Fig 10a. Switching Time Test Circuit

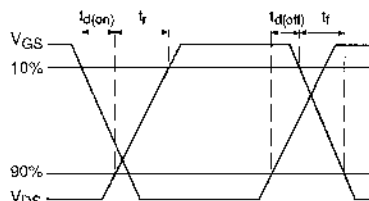


Fig 10b. Switching Time Waveforms

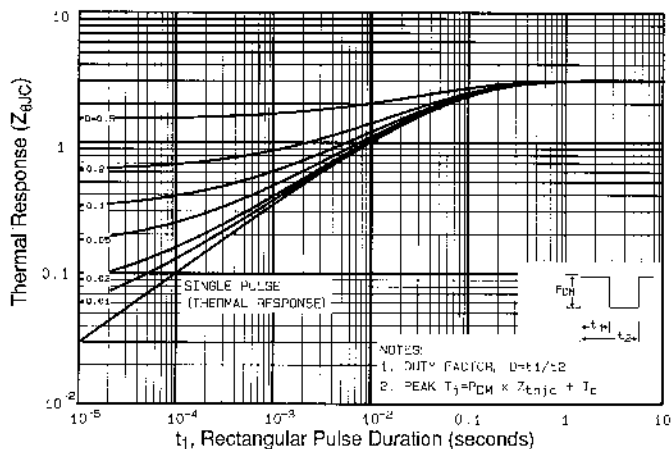


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

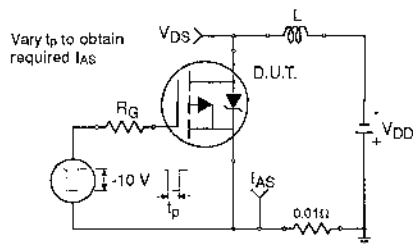


Fig 12a. Unclamped Inductive Test Circuit




Fig 12b. Unclamped Inductive Waveforms

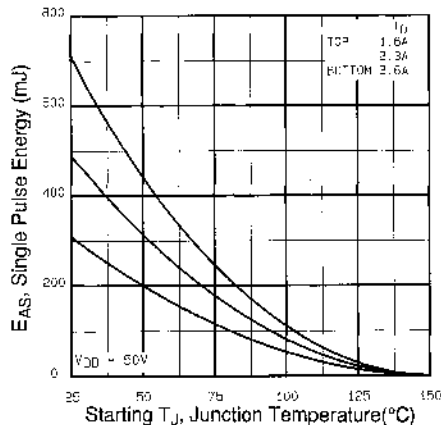


Fig 12c. Maximum Avalanche Energy Vs. Drain Current

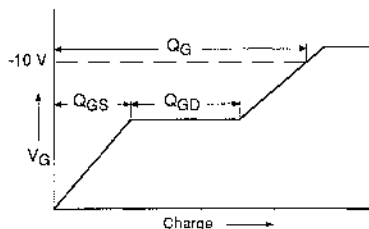


Fig 13a. Basic Gate Charge Waveform

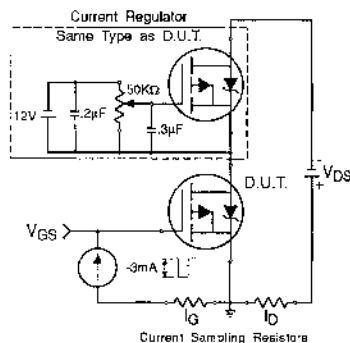


Fig 13b. Gate Charge Test Circuit

Appendix A: Figure 14, Peak Diode Recovery dv/dt Test Circuit – See page 1506

Appendix B: Package Outline Mechanical Drawing – See pages 1512, 1513

Appendix C: Part Marking Information – See page 1518

Appendix D: Tape & Reel Information – See page 1523