
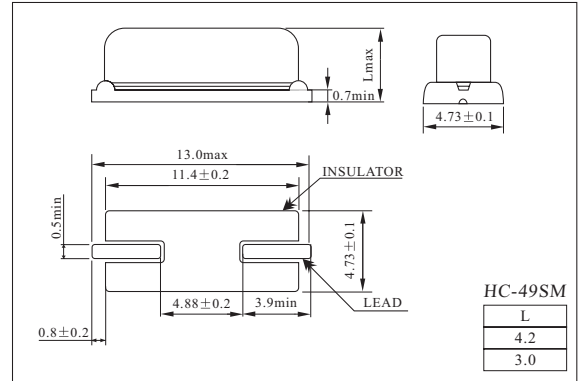
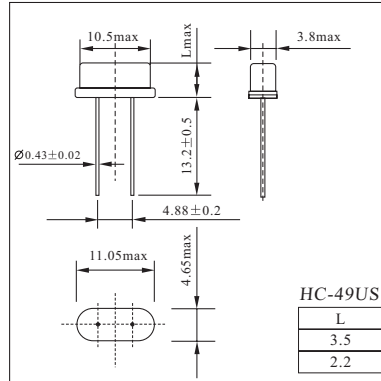


QUARTZ CRYSTAL RESONATOR

石英晶体谐振器

HC-49US/HC-49SM DIP/SMD TYPE

DIMENSIONS (Unit:mm) 外形尺寸



PART NUMBER GUIDE 部件号示例 e.g. FTX3.579M20S (*S=HC-49US SM=HC-49SM)

	Quartz Crystal Resonator 石英晶体谐振器	Frequency 频率(3.579545MHz)	Load Capacitance 负载电容	*Package Type 盒形
FT	X	3.579M	20	S

1.PARAMETERS 技术参数

PARAMETER	参 数	SPECIFICATION 规格
Frequency Range	频率范围 (MHz)	3.0MHz~75.0MHz
Operation Mode	振动模式	See Table 2 见表2
Load capacitance C_L	负载电容 (pF)	20pF Std. 8 to 35pF series available
Frequency Tolerance F_L	调整频差 (ppm)	± 30 ppm@25°C Std. (± 5 ppm~ ± 100 ppm available)
Temperature Tolerance T_L	温度频差 (ppm)	± 50 ppm Std. (See Table 3 见表3)
Operating Temperature T_O	工作温度 (°C)	-10°C to +60°C Std. (See Table 3 见表3)
Storage Temperature S_T	储存温度 (°C)	-55°C to +125°C
Motional Resistance R_s	谐振电阻 (Ω)	See Table 2 见表2
Shunt Capacitance C_0	静态电容 (pF)	7pF max
Drive Level D_L	激励电平 (mW)	0.01mW~1mW
Insulation Resistance I_R	绝缘电阻 (M Ω)	500(DC500 \pm 10V) min
Aging@25°C	年老化率 (ppm/y)	± 5 ppm max

© All specifications subject change without notice. 规格变化, 恕不另行通知。

2. OPERATION MODE AND RS 振动模式与谐振电阻

FREQUENCY	TYPE	MODE	HC-49U/S (Ω max)
3.0MHz~3.5MHz		FUND	300
3.5MHz~3.8MHz		FUND	150
3.8MHz~4.1MHz		FUND	120
4.1MHz~5.0MHz		FUND	100
5.0MHz~6.0MHz		FUND	80
6.0MHz~8.0MHz		FUND	70
8.0MHz~10.0MHz		FUND	60
10.0MHz~12.0MHz		FUND	50
12.0MHz~28.0MHz		FUND	40
28.0MHz~33.5MHz		FUND	50
26.0MHz~40.0MHz		3 rd OVERTONE	100
20.0MHz~40.0MHz		BT Found	40

3. FREQUENCY-TEMPERATURE TOLERANCE 温度频差

- Recommended 推荐使用 ○ Available 可用

Cutting 切型	Temp. Range	Tolerance (ppm)					
		± 5	± 10	± 15	± 20	± 30	± 50
AT	0°C~+50°C	○	○	○	○	○	○
	-10°C~+60°C		○	○	○	●	○
	-20°C~+70°C			○	○	○	●
	-30°C~+80°C				○	○	○
	-40°C~+85°C						○
BT	Freq. vs temp. for cutting within a range of ± 80 ppm~ ± 120 ppm BT 切温度频差一般为 ± 80 ppm~ ± 120 ppm						