

International
IR Rectifier

MBR10.. Series
MBRB10.. Series

SCHOTTKY RECTIFIER

10 Amp

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	10	A
I_{FRM} @ $T_C = 135^\circ\text{C}$	20	A
V_{RRM}	35/45	V
I_{FSM} @ $t_p = 5\mu\text{s}$ sine	1060	A
V_F @ 10Apk, $T_J = 125^\circ\text{C}$	0.57	V
T_J range	-65 to 150	$^\circ\text{C}$

Description/Features

This Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150°C T_J operation
- TO-220 and D²Pak packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

MBR10.. Series



TO-220AC

MBRB10.. Series



D²PAK

Voltage Ratings

Part number	MBR1035 / MBRB1035	MBR1045 / MBRB1045
V_R Max. DC Reverse Voltage (V)	35	45
V_{RRM} Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	10	A	@ $T_C = 135^\circ\text{C}$, (Rated V_R)
I_{FRM} Peak Repetitive Forward Current	20	A	Rated V_R , square wave, 20kHz $T_C = 135^\circ\text{C}$
I_{FSM} Non Repetitive Peak Surge Current	1060	A	5 μs Sine or 3 μs Rect. pulse
	150		Following any rated load condition and with rated V_{RRM} applied Surge applied at rated load conditions halfwave, single phase, 60Hz
I_{RRM} Peak Repetitive Reverse Surge Current	1.0	A	2.0 μsec 1.0 KHz

Electrical Specifications

Parameters	Values	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1)	0.84	V	@ 20A $T_J = 25^\circ\text{C}$
	0.57	V	@ 10A $T_J = 125^\circ\text{C}$
	0.72	V	@ 20A $T_J = 125^\circ\text{C}$
I_{RM} Max. Instantaneous Reverse Current (1)	0.1	mA	$T_J = 25^\circ\text{C}$ Rated DC voltage
	15	mA	$T_J = 125^\circ\text{C}$
$V_{F(TO)}$ Threshold Voltage	0.354	V	$T_J = T_J \text{ max.}$
r_t Forward Slope Resistance	17.6	m Ω	
C_T Max. Junction Capacitance	600	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change (Rated V_R)	1000	V/ μs	

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
T_J Max. Junction Temperature Range	-65 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-65 to 175	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case	2.0	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased Only for TO-220
wt Approximate Weight	2(0.07)	g(oz.)	
T Mounting Torque	Min.	6(5)	Kg-cm (lbf-in)
	Max.	12(10)	

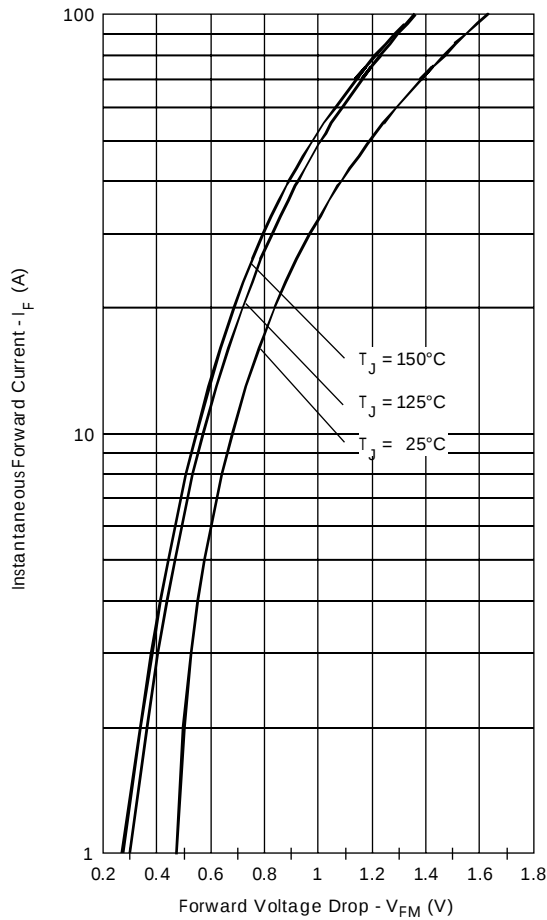


Fig. 1 - Max. Forward Voltage Drop Characteristics

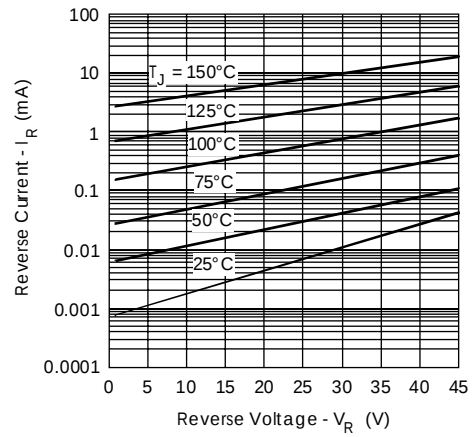


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

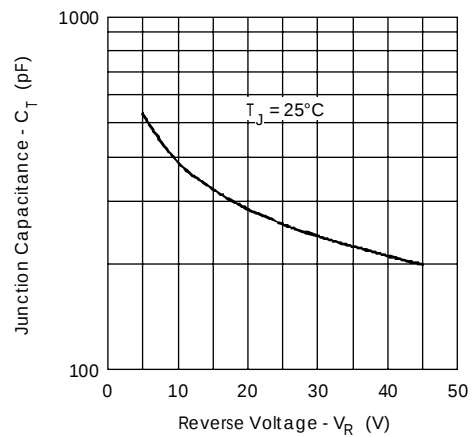


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

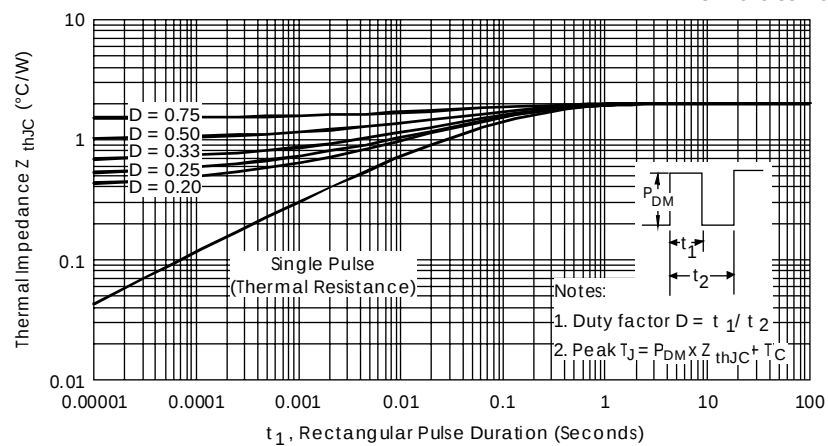


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

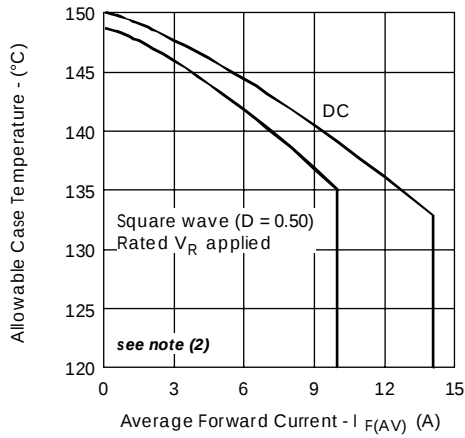


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

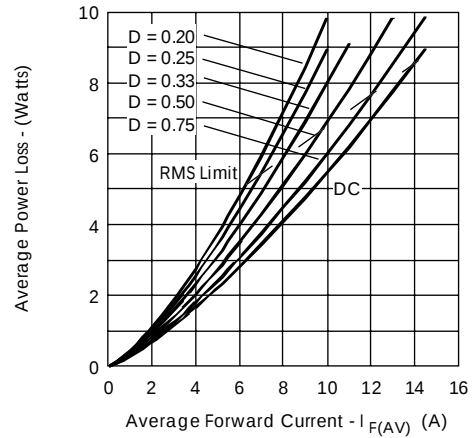


Fig. 6 - Forward Power Loss Characteristics

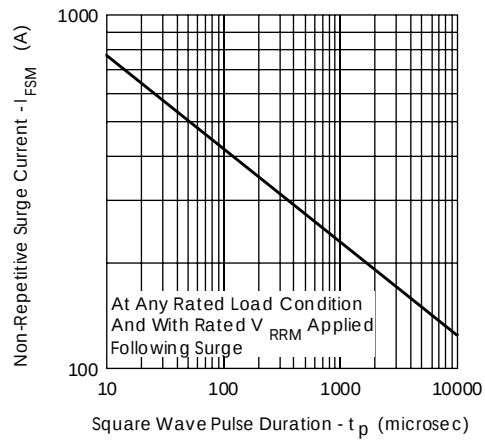


Fig. 7 - Max. Non-Repetitive Surge Current


(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;

P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = rated V_R

Ordering Information Table

Device Code



1 - Essential Part Number

2 - B = Surface Mount
None = TO-220


3 - Current Rating

4 - Voltage code: Code = V_{RRM}


35 = 35V

45 = 45V


Outline Table

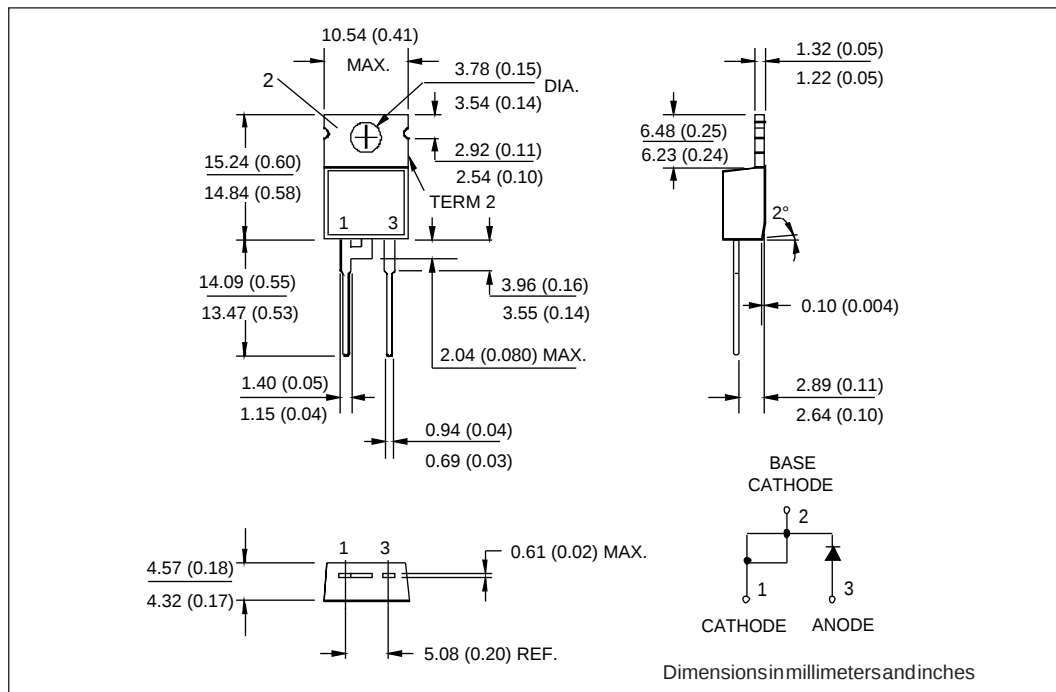

Outline Table

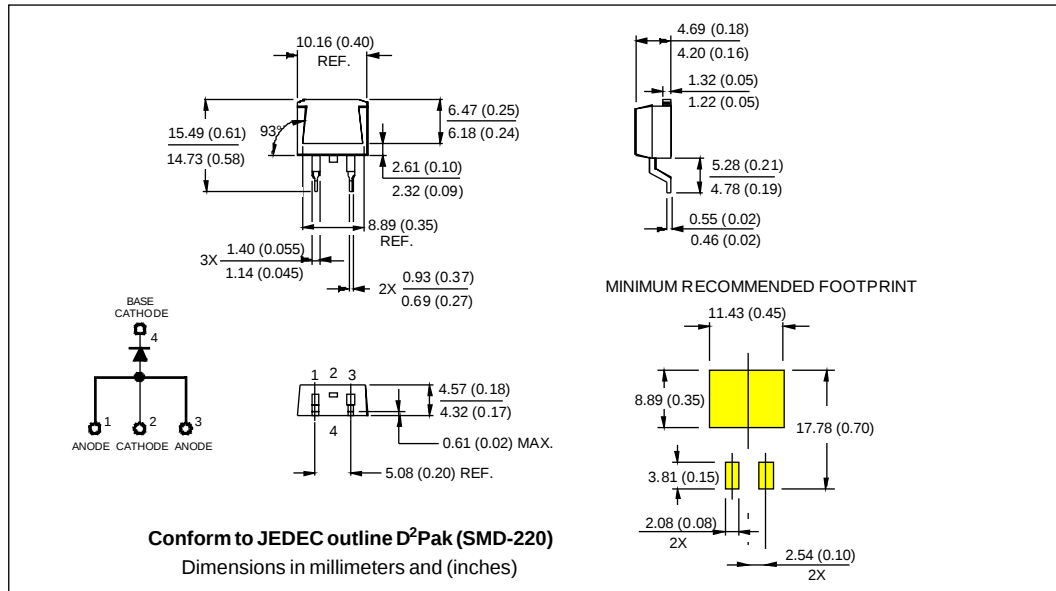

Tape & Reel Information

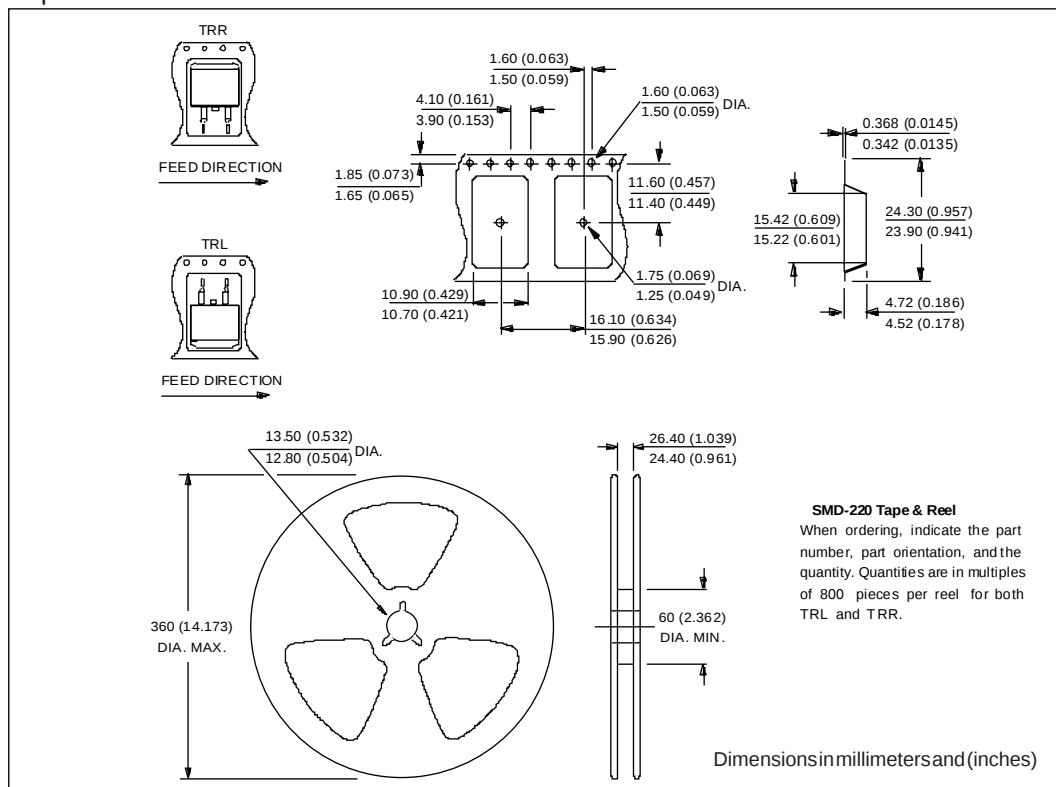

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.
IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.
IR TAIWAN: 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.