


Support Post (Metric)

Spacer Bolts DIA

[Brass, UNC-thread]

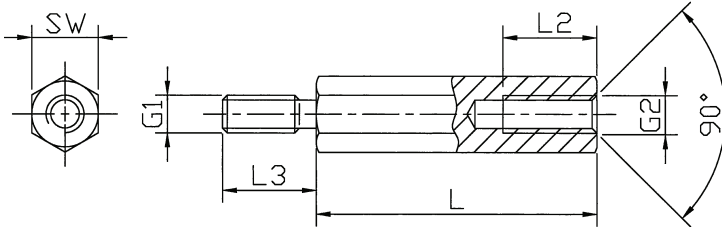

Spacer bolts

Type

hexagonal

Styles

internal / external
with undercut
(optional without undercut)

Material

Brass 2.0401 / DMS 100

Surface

nickel plated (G3E)

Standard Pack

from 100 pcs

Thread lengths [mm]

L	L2	L3
5	3	4, 5, 6, 8, 10, 12
6	4	6, 8

All UNC-types are also available in steel, various lengths as well as UNC 6-32, 8-32 UNC and UNC 2-56 threads.

The tolerances for length dimensions: + / - 0.1 mm



Standard lengths [mm]

Order No.	SW (hexagonal)	Internal thread	External thread	05	06
2100 x (length)	SW 5	4-40 UNC	4-40 UNC	05	06
2103 x	SW 5	4-40 UNC	M3	05	06
2130 x	SW 5	M3	4-40 UNC	05	06

SW: width across flats

Ordering example: 2100 x 05 / 12 = DIA / Br / SW 5 / UNC 4-40 x 05 / 12 (Body length / Outer thread length)

Please add the suffix "of" to the article No. to specify the variant without undercut.