


**MALE HEADER, ANGLED
PITCH 2.54x2.54mm
ACC. TO EN 60603-13**

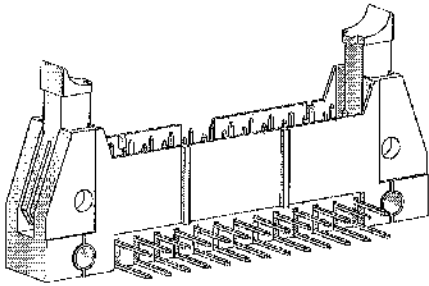


Contacts: Copper alloy
 Finish: RL1-RL3: gold plated
 RL4: tin plated
 Insulator: PBT 20% GF
 Withstanding voltage: 1000V DC or AC peak
 Current rating: 1.0A
 Contact resistance: 20mOhm
 Insulation resistance: 5000MOhm at 100V
 Life: RL1: 500 mating cycles
 RL2: 250 mating cycles
 RL3: 50 mating cycles
 RL4: 50 mating cycles

RoHS Compliant

Accessories:

Latch (short): SPMH-LC-SHORT
 Latch (long): SPMH-LC-LONG

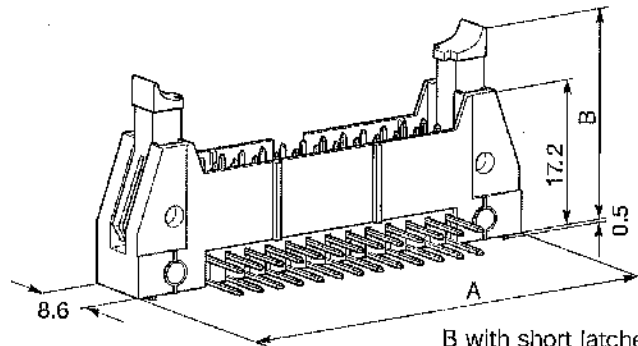

B with short latches: 23.1mm
 B with long latches: 26.6mm

No. of Contacts	10	14	16	20	26	34	40	50	60
A [mm]	32.2	37.2	39.8	44.9	52.5	62.6	70.3	83.0	95.6

SPMHxxA-3000

not used
 Latches: 0 (Standard)
 0 = without latches
 1 = with short latches
 2 = with long latches
 Pin length: 0 = 2.9mm (Standard)
 1 = 4.5mm
 Requirement level: 1 = RL1 = gold plated, 500 mating cycles
 2 = RL2 = gold plated, 250 mating cycles
 3 = RL3 = gold plated, 50 mating cycles
 4 = RL4 = tin plated, 50 mating cycles
 Style: A = Angled
 No. of contacts

